



## [2016 Feb-NEW

2016 February NEW CCIE 400-201 Exam Questions and Answers RELEASED Today! Exam Code: 400-201 Exam Name: CCIE SP Written v4.0 Certification Provider: Cisco Corresponding Certification: CCIE Service Provider Test Time: 120 minutes (90-110 questions) 2016 NEW Exam Topics will be tested: 1. Service Provider Architecture and Evolution 2. Core Routing 3. Service Provider Based Services 4. Access and Aggregation 5. High Availability and Fast Convergence 6. Service Provider Security, Service Provider Operation and Management ATTENTION: 2016 CCIE 400-201 Exam Adds many new exam questions! QUESTION 247 Two switches are connected back-to-back using two Gigabit Ethernet interfaces. These two interfaces are assigned to a port channel in VLAN trunk mode. Which configuration sequence allows the addition of a new VLAN in this link? A. Add the VLAN to the port channel only, and remove it from the individual links. B. Add the VLAN to both the port channel and individual links. C. Add the VLAN to the port channel only, and it will be reflected on the individual links. D. Add the VLAN to the individual links, and it will be reflected on the port channel. Answer: C QUESTION 248 An engineer is troubleshooting Precision Time Protocol on Cisco ASR 9000 router and noticed the protocol is running in a Multicast mode. Which two results regarding the messages can the engineer expect? (Choose two) A. IPTP messages that use unicast messages and those that use multicast messages must be specified. B. Announce and Sync messages are sent as multicast messages. C. Signaling, Delay-Request and Delay-Response messages are sent as multicast messages. D. All messages for PTP will be sent as multicast messages. E. Announce and Sync messages are sent as unicast messages. F. Signaling, Delay-Request, and Delay-Response messages are sent as unicast messages. Answer: BF QUESTION 249 Which are the two advantages if an ISP chooses a platform that runs Cisco IOS-XR Software instead of Cisco IOS Software? (Choose two.) A. Cisco IOS XR Software functions as a message-passing operating system. B. The system's scheduler is priority-based. C. The context switching is based on Cisco Express Forwarding. D. VoIP traffic is hardware-processed for real-time response. E. Communication between client and server is realized by a dedicated mechanism. Answer: AB QUESTION 250 Refer to the exhibit. MPLS VPN service has been provisioned for a customer by using inter-AS MPLS Option C. It is possible to redistribute ISP1 and ISP2 received loopback addresses into the local IGP. How many labels are associated with packet forwarding between the ASBRs?

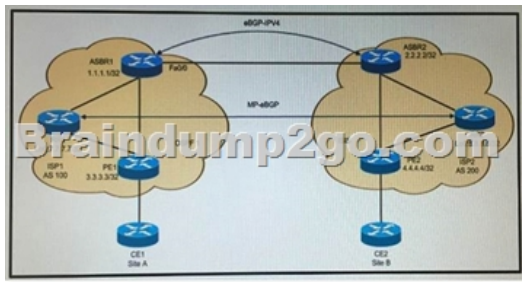


A. 0 B. 1 C. 2 D. 3 E. 4 Answer: C QUESTION 251 In a multi-VRF scenario using OSPF as PE-CE routing protocol, which Cisco IOS command allows the CE to accept routes from PE inside of each VRF? A. router ospf <process id> vrf <vrf name> capability vrf-lite B. router ospf <process id> vrf <vrf name> domain-id <value> C. router ospf <process id> domain-id <value> D. router ospf <process id> capability vrf-lite Answer: A QUESTION 252 Refer to the exhibit:

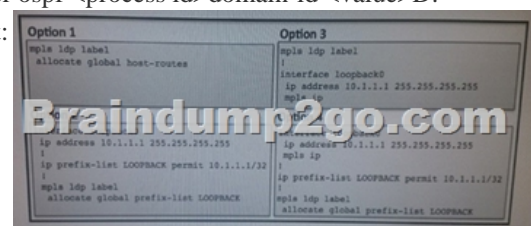

Which Cisco IOS XE configuration method allocates a label for prefixes with a /32 subnet mask only? A. Option 1 B. Option 2 C. Option 3 D. Option 4 Answer: A QUESTION 253 Due to recent acquisitions, a company's MPLS infrastructure is growing very quickly. Concerns arise about labeling each and every IP address on the service provider core network. The IP address space is designed as per following:- Service provide ip address range is: 10.0.0.0/16- All loopback addresses use subnet mask /32- 10.0.0.0/24 range is used for loopback addresses- All other subnet masks used for links are /24 and /25 Which command would significantly reduce the label allocations without compromising LDP functionalities? A. ip prefix-list L1st1 deny 10.0.0./16 le 20 ge 25 !mpls ldp label allocate global prefix-list List1 B. access-list 1 permit 10.0.0.0 0.0.255.255 mpls ldp neighbor 10.0.0.1 labels accept 3 C. mpls ldp label allocate global host-routes D. mpls ldp password required for 10 !access-list 10 permit 10.0.0.1

access-list 10 permit 10.0.0.2access-list 10 permit 10.0.0.3 Answer: C QUESTION 254Which OSPF configuration suppresses the periodic OSPF hello packets? A. router ospf 1area0interface GigabitEthernet 0/1passiveB. router ospf 1area0interface GigabitEthernet 0/1hello-interval 0C. router ospf 1stub-router router-lsa r-bitD. router ospf 1area 0interface GigabitEthernet 0/1demand-circuitpoint-to-point Answer: D QUESTION 255Refer to the exhibit. The prefix 10.1.1.64/28 should be advertised to the PE router, yet the prefix is not being received by the PE. Which configuration should be applied on CE in order to fix this issue?



A. ip prefix-list ROUTES\_TO\_SP seq 1 permit 10.1.1.64/28B. router bgp 65000no network 10.1.1.64 mask 255.255.255.240network 10.1.1.128 mask 255.255.255.128C. ip prefix-list ROUTES\_TO\_SP permit 10.1.1.64/28D. router bgp 65000no network 10.1.1.64 mask 255.255.255.240network 10.1.1.0 mask 255.255.255.0 Answer: A 2016 February NEW 400-201 Dumps & NEW 400-201 Exam Questions 316Q Full Version Free Shared By Braindump2go: <http://www.braindump2go.com/400-201.html>

<b>Compared Be</b>
<b>Pass4sure</b>
<b>Not In Stock</b>
/
/